


Ductile Iron Flange Adapter for Steel / Ductile Iron Pipes

Ref: DFAR0918

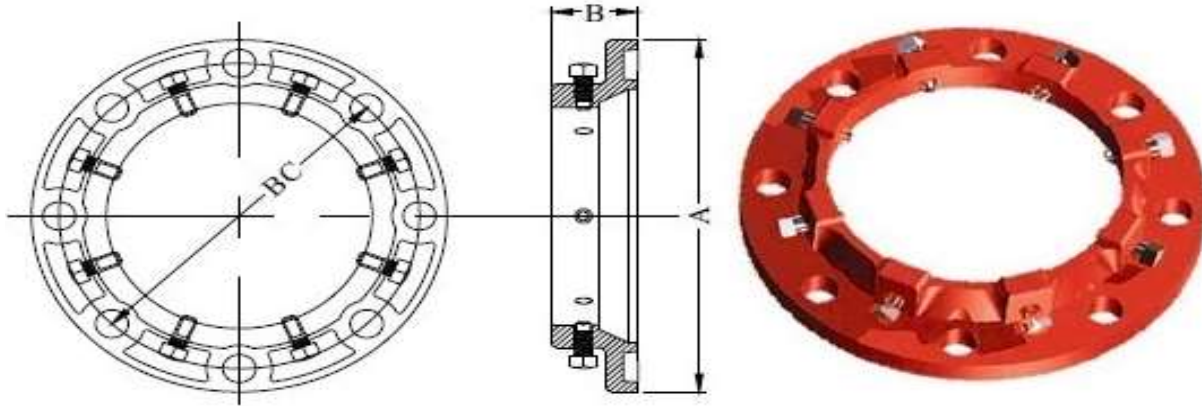

Item Number	Nom Pipe Size	Steel Pipe OD	D.I Pipe OD	A	B	BC (Bolt Circle)	Bolt Hole Diameter	Set Screw		Weight Lbs
								Size	Quantity	
DFAR002	2"	2.38	2.50	6.00	1.80	4.75	0.75	0.50 x 1.00	2	4.0
DFAR003	3"	3.50	3.96	7.50	2.00	6.00	0.75	0.50 x 1.25	4	5.9
DFAR004	4"	4.50	4.80	9.00	2.07	7.50	0.75	0.50 x 1.25	4	8.5
DFAR006	6"	6.63	6.90	11.00	2.19	9.50	0.88	0.50 x 1.25	8	11.5
DFAR008	8"	8.63	9.05	13.50	2.31	11.75	0.88	0.63 x 1.50	8	18.0
DFAR010	10"	10.75	11.10	16.00	2.50	14.25	1.00	0.63 x 1.50	12	26.0
DFAR012	12"	12.75	13.20	19.00	2.50	17.00	1.00	0.63 x 1.50	12	36.0

* Dimensions are in inches.

- ▶ Ductile Iron ASTM A536 (65-45-12)
- ▶ Flange Bolt Hole Drilling: ANSI B16.1 Class 125
- ▶ Flange Ends: ANSI Class 125 / 150 & AWWA C115
- ▶ Pressure Rating: 3"- 8"(200 PSI) & 10"-12"(175 PSI)
- ▶ Coating: Coral Red RAL 3016
- ▶ Set Screw: ANSI 4140 Steel, Heat Treated & Plated.
- ▶ Gasket: Standard on D.I & Transition on Steel

▶ Application: Use on PC350 D.I Pipes and Sch40 Steel Pipes, above or below ground, jobs involving retro-fittings, pipe fabrication can be done on site by using plain end pipe and during maintenance it can easily be disassembled.

**Please send your orders to orders@uvintl.com
or call (800) 848-6884**