



relationships **FORGED**
solutions **CAST**


U.V. International LLC

360 Mount Kemble Avenue Suite# 2000, Morristown, 07960 NJ

Phone: (973) 775 1660 | Fax: (973) 775 1680

uvnj@uvintl.com | www.uvintl.com

Hydrant Riser (HRR)

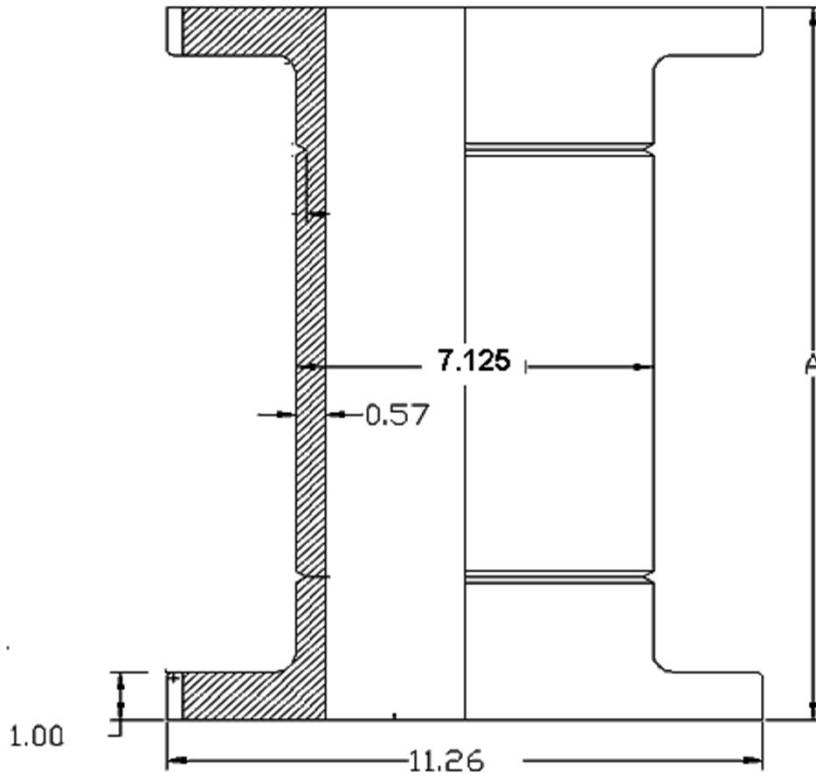

*All dimensions are in inches.

Dim A equals size of riser in inches. (eg. For 4" riser, A=4")

Size Range A : 2"/3"/4"/6"/8"/10"/12"/14"/15"/16"/18"/20"/22"/24"/26"/28"/30"/32" & 36".

Inside Diameter 6" . Both Flange faces have serration 1/64" deep.

Hydrants can be made with grooves / without grooves . Machined grooves in V-Section

Bolt Pattern as per Purchase Order. Bolt Holes equally spaced straddling parting line.

Material: Cast Iron ASTM A126 Class B / Ductile Iron ASTM A536 Grade 70:50:05

Pressure Test @ 300 psi

Coating : Inside : Cement lined & Tar Dipped ; Outside: Tar Dipped

To order Call: (973) 775 1660 X 4 Fax: (973) 775 1680

Email: Orders@uvintl.com Web: www.uvintl.com