


STRUT CHANNELS (Pre-Galvanized & Hot Dip Galvanized)

Ref: SRL-SPEC0521



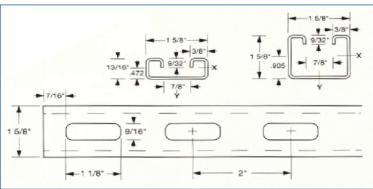

Sr. No.	Item Code	Description	Pcs/Bundle	lbs./ft.
1	SCL/2141/14G	Strut Channel Slotted 13/16" x 1-5/8" 14 gauge	100	0.9
2	SCL/2141/12G	Strut Channel Slotted 13/16" x 1-5/8" 12 gauge	100	1.2
3	SCL/4141/14G	Strut Channel Slotted 1-5/8" x 1-5/8" 14 gauge	50	1.3
4	SCL/4141/12G	Strut Channel Slotted 1-5/8" x 1-5/8" 12 gauge	50	1.8

Material: Carbon Steel ASTM A653 SS GR 33

Finish: Pre-galvanized: G90

Hot Dip Galvanized: ASTM A123

Length: 10' & 20'

Thickness: 12 & 14 Gauge

Slots: Oval, Long, no slot, Hole

Load Data: Loads are based on 33 ksi steel cold formed to 42 ksi

Safety Factor to Yield Strength is 1.67 for Beam Loads and 1.80 for Column Loads.

To order or for further details, please call (800) 848-6884 or email: orders@uvintl.com

Headquarters

360 Mount Kemble Ave. Suite 2000 Morristown, NJ 07960 Ph: (973) 775-1660 Fax: (973) 775-1680

Email: uvnj@uvintl.com

Distribution Centers

Hueytown, AL; Fontana, CA; West Sacramento, CA; Atlanta, GA; Baltimore, MD; Minneapolis MN; Dallas, TX; Houston, TX