


## **BEAM CLAMP**

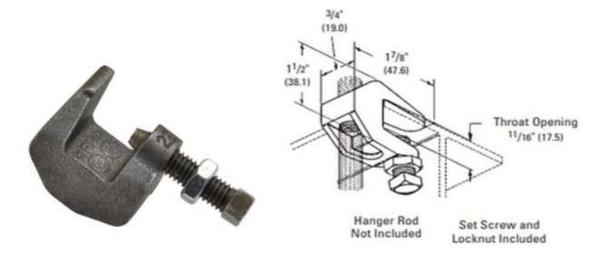

**Application:** This clamp can be used with bar joist construction. It can be attached to top or

bottom sections of beam.

**How to size:** Size of clamp is determined by size of rod to be used.

**Size Range:** 3/8" & 1/2"

Malleable Iron & Steel

Finish: Plain & Electro-Galvanized

Approval: FM approval & UL listed

**Features:** 

- They may be attached to horizontal flanges of structural members in either the top beam or bottom beam positions.
- Secured in place by a cup-pointed Set Screw tightened against the flange. A Jam Nut is provided for tightening the Set Screw against the Body Casting.
- Thru tapping of the body casting permits extended adjustment of the threaded rod.

To order or for further details, please call (800) 848-6884 or email: orders@uvintl.com

## Headquarter

**U.V International LLC** 

360 Mount Kemble Ave. Suite 2000 Morristown, NJ 07960

**Phone:** 973 775-1660 **Fax:** 973 775-1680

## **Distribution Centers**

Hueytown, AL; Fontana, CA; West Sacramento, CA; Atlanta, GA; Hagerstown, MD; Dallas, TX; Houston, TX