


Grey Iron Threaded Companion Flanges for Steel Pipe

Class 125 & 250 /ASME/ANSI B16.1

Ref: SPF1021

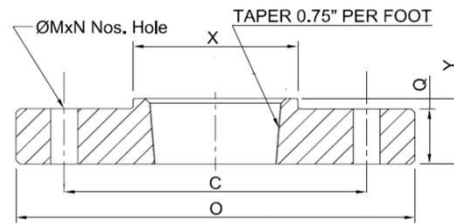

Specifications (Class 125)

Item Number	Nom. Pipe Size	ID (small end) X OD	Flange Outer Diameter (O)	Bolt Circle (C)	B.Hole Diameter (M)	No. of Holes (N)	Diameter of Hub (X)	Flange Thickness (Q)	Length through Hub (Y)	Weight lbs
SPF0142	1	1 x 4 1/4	4.25	3.12	0.62	4	1.94	0.44	0.69	1.8
SPF1254	1 1/4	1 1/4 x 4 5/8	4.62	3.50	0.62	4	2.31	0.50	0.81	2.0
	1 1/2	1 1/2 x 5	5.00	3.88	0.62	4	2.56	0.56	0.88	2.3
SPF0206	2	2 x 6	6.00	4.75	0.75	4	3.06	0.62	1.00	4.0
SPF0207	2 1/2 x 2	2 x 7	7.00	5.50	0.75	4	3.06	0.69	1.00	6.8
SPF2507	2 1/2	2 1/2 x 7	7.00	5.50	0.75	4	3.56	0.69	1.12	6.0
SPF0275	3 x 2	2 x 7 1/2	7.50	6.00	0.75	4	3.06	0.75	1.00	9.0
SPF2575	3 x 2 1/2	2 1/2 x 7 1/2	7.50	6.00	0.75	4	3.56	0.75	1.12	8.0
SPF0375	3	3 x 7 1/2	7.50	6.00	0.75	4	4.25	0.75	1.19	7.7
SPF0209	4 x 2	2 x 9	9.00	7.50	0.75	8	3.06	0.94	1.00	14.0
SPF2509	4 x 2 1/2	2 1/2 x 9	9.00	7.50	0.75	8	3.56	0.94	1.12	13.5
SPF0309	4 x 3	3 x 9	9.00	7.50	0.75	8	4.25	0.94	1.19	12.8
SPF0409	4	4 x 9	9.00	7.50	0.75	8	5.31	0.94	1.31	11.8
SPF0510	5	5 x 10	10.00	8.50	0.88	8	6.44	0.94	1.44	14.0
SPF2511	6 x 2 1/2	2 1/2 x 11	11.00	9.50	0.88	8	3.56	1.00	1.12	25.0
SPF0311	6 x 3	3 x 11	11.00	9.50	0.88	8	4.25	1.00	1.19	23.0
SPF0411	6 x 4	4 x 11	11.00	9.50	0.88	8	5.31	1.00	1.31	21.0
SPF0611	6	6 x 11	11.00	9.50	0.88	8	7.56	1.00	1.56	16.5
SPF2135	8 x 2	2 x 13 1/2	13.50	11.75	0.88	8	3.06	1.12	1.19	44.0
SPF3135	8 x 3	3 x 13 1/2	13.50	11.75	0.88	8	4.25	1.12	1.19	40.0
SPF4135	8 x 4	4 x 13 1/2	13.50	11.75	0.88	8	5.31	1.12	1.31	37.0
SPF6135	8 x 6	6 x 13 1/2	13.50	11.75	0.88	8	7.56	1.12	1.56	31.0
SPF8135	8	8 x 13 1/2	13.50	11.75	0.88	8	9.69	1.12	1.75	26.0

Specifications (Class 250)

Item Number	Nom. Pipe Size	ID (small end) X OD	Flange Outer Diameter (O)	Bolt Circle (C)	B.Hole Diameter (M)	No. of Holes (N)	Diameter of Hub (X)	Flange Thickness (Q)	Length through Hub (Y)	Weight lbs
SPF1016	10	10 x 16	16.00	14.25	1.00	12	11.94	1.19	1.94	37.8
SPF1219	12	12 x 19	19.00	17.00	1.00	12	14.06	1.25	2.19	55.2
SHF0410	5 x 4	4 x 10	10.00	7.88	0.88	8	5.31	1.25	1.75	20.5

* Dimensions are in inches.

- ▶ Grey Iron ASTM A126 Class B
- ▶ Machined, Drilled and Faced in accordance with ASME/ANSI B16.1-Class 125 & Class 250
- ▶ Threaded in accordance with ANSI /ASME B 1.20.1 (National Pipe Taper Threads)
- ▶ Class 250 - Flange thickness(Q) includes raised face 0.06"
- ▶ Coating : Bare (Optional: Paint or Galvanized)