




U.V. International LLC.

240 Cedar Knolls Road, Suite 100 Cedar Knolls, NJ 07927

Phone (973) 993-9454 Fax (973) 993-0837

Email: uvnj@uvintl.com Web Page: www.uvintl.com

Class 125 & 250 Cast Iron Companion Flange

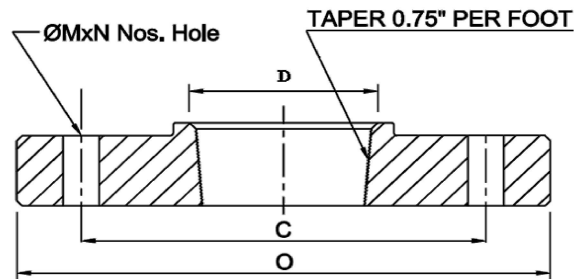

Specifications (Class 125)

| Item No | Pipe Size | ID (small end) X OD | Threads per inch | O | C | M | N | D | Weight lbs |
|---------|-------------|---------------------|------------------|-------|-------|------|----|-------|------------|
| SPF0142 | 1" | 1" x 4 1/4" | 11 1/2 | 4.25 | 3.12 | 0.62 | 4 | 1.38 | 1.75 |
| SPF1254 | 1 1/4" | 1 1/4" x 4 5/8" | 11 1/2 | 4.62 | 3.50 | 0.62 | 4 | 1.61 | 2.00 |
| SPF1505 | 1 1/2" | 1 1/2" x 5" | 11 1/2 | 5.00 | 3.88 | 0.62 | 4 | 1.89 | 2.25 |
| SPF0206 | 2" | 2" x 6" | 11 1/2 | 6.00 | 4.75 | 0.75 | 4 | 2.36 | 4.00 |
| SPF0207 | 2 1/2" x 2" | 2" x 7" | 11 1/2 | 7.00 | 5.50 | 0.75 | 4 | 2.36 | 6.75 |
| SPF0209 | 4" x 2" | 2" x 9" | 11 1/2 | 9.00 | 7.50 | 0.75 | 8 | 2.87 | 11.00 |
| SPF2507 | 2 1/2" | 2 1/2" x 7" | 8 | 7.00 | 5.50 | 0.75 | 4 | 2.87 | 6.00 |
| SPF0302 | 3" x 2" | 2" x 7 1/2" | 11 1/2 | 7.50 | 6.00 | 0.75 | 4 | 2.36 | 10.00 |
| SPF0325 | 3" x 2 1/2" | 2 1/2" x 7 1/2" | 8 | 7.50 | 6.00 | 0.75 | 4 | 2.87 | 8.00 |
| SPF0375 | 3" | 3" x 7 1/2" | 8 | 7.50 | 6.00 | 0.75 | 4 | 3.38 | 7.63 |
| SPF0425 | 4" x 2 1/2" | 2 1/2" x 9" | 8 | 9.00 | 7.50 | 0.75 | 8 | 2.36 | 13.50 |
| SPF0403 | 4" x 3" | 3" x 9" | 8 | 9.00 | 7.50 | 0.75 | 8 | 3.38 | 12.75 |
| SPF0409 | 4" | 4" x 9" | 8 | 9.00 | 7.50 | 0.75 | 8 | 4.41 | 11.75 |
| SPF0510 | 5" | 5" x 10" | 8 | 10.00 | 8.50 | 0.88 | 8 | 5.43 | 14.00 |
| SPF0625 | 6" x 2 1/2" | 2 1/2" x 11" | 8 | 11.00 | 9.50 | 0.88 | 8 | 2.87 | 25.00 |
| SPF0603 | 6" x 3" | 3" x 11" | 8 | 11.00 | 9.50 | 0.88 | 8 | 3.38 | 23.00 |
| SPF0604 | 6" x 4" | 4" x 11" | 8 | 11.00 | 9.50 | 0.88 | 8 | 4.41 | 21.00 |
| SPF0611 | 6" | 6" x 11" | 8 | 11.00 | 9.50 | 0.88 | 8 | 6.41 | 16.50 |
| SPF0802 | 8" x 2" | 2" x 13 1/2" | 11 1/2 | 13.50 | 11.75 | 0.88 | 8 | 2.36 | 45.00 |
| SPF0803 | 8" x 3" | 3" x 13 1/2" | 8 | 13.50 | 11.75 | 0.88 | 8 | 3.38 | 40.00 |
| SPF0804 | 8" x 4" | 4" x 13 1/2" | 8 | 13.50 | 11.75 | 0.88 | 8 | 4.41 | 37.00 |
| SPF0806 | 8" x 6" | 6" x 13 1/2" | 8 | 13.50 | 11.75 | 0.88 | 8 | 6.41 | 31.00 |
| SPF8135 | 8" | 8" x 13 1/2" | 8 | 13.50 | 11.75 | 0.88 | 8 | 8.42 | 26.00 |
| SPF1016 | 10" | 10" x 16" | 8 | 16.00 | 14.25 | 1.00 | 12 | 10.43 | 27.75 |
| SPF1219 | 12" | 12" x 19" | 8 | 19.00 | 17.00 | 1.00 | 12 | 12.40 | 59.00 |

Specification (Class 250)

| Item No | Pipe Size | ID (small end) X OD | Threads per inch | Dimensions indicated in mm | | | | | Weight lbs |
|---------|-----------|---------------------|------------------|----------------------------|------|-----|---|------|------------|
| | | | | O | C | M | N | Ø | |
| SHF0410 | 5" x 4" | 4" x 10" | 8 | 10.00 | 7.87 | 0.9 | 8 | 4.41 | 20.50 |

Material: Grey Iron ASTM A 126 Class B

Drilled and Faced in accordance to ANSI B16.1 Class 125 & Class 250

Threading in accordance to ANSI B1.20.1

Coating : Bare (Optional: Paint or Galvanized)

To Order call: (973) 993 9454 Fax: (973) 993 0837 EMail at uvnj@uvintl.com

Website: www.uvintl.com